




ELA-1006



Lock nut feature permits mechanical load holding

ELA-SERIES SINGLE ACTING ALUMINIUM LOCK NUT CYLINDER

- ◆ Safety lock nut for mechanical load holding.
- ◆ Low weight and good portability.
- ◆ High flow EAB-201 quick coupler.
- ◆ Overflow port functions as a stroke limiter.
- ◆ Spring return .
- ◆ Features carrying handle.

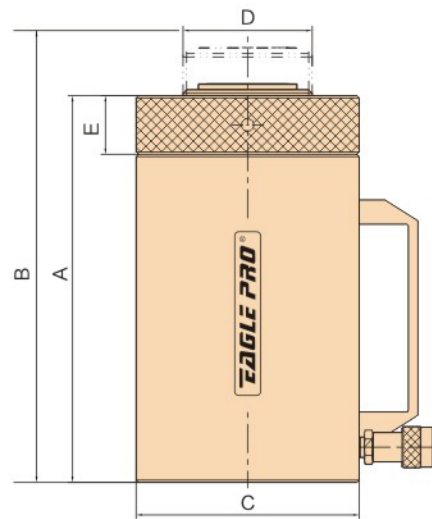

Cylinder Capacity @ 700 Bar (10,000 PSI)	Stroke	Model	Cylinder Effective Area	Oil Capacity	Collapsed Height	Extended Height	Outside Diameter	Piston Rod Diam.	Nut Thickness	Weight
					A	B				
Metric Ton(US Ton)	in		in ²	in ³	in	in	in	mm	in	lbs
50	6.00	ELA-556	10.99	67.07	12.50	18.60	5.27	Tr80X4	1.57	26.4
100	6.00	ELA-1006	20.58	128.39	13.37	19.60	7.44	Tr110X6	1.97	66