




## EPC-SERIES AIR HYDRAULIC PUMPS


### ► Features

- ◆ Can be used with a variety of Hydraulic cylinders, Presses or other Hydraulic tools.
- ◆ Operating air pressure between 0.6-1.0 MPa.
- ◆ Provides up to 10000 PSI of hydraulic pressure.
- ◆ Input port thread 1/4-18 NPT and output 3/8-18 NPT.
- ◆ Internal load limiting device avoids overload.
- ◆ Air exhaust muffler for quiet operation.
- ◆ Pumps feature both air and oil filters to reduce risk of damage from environmental contaminants.
- ◆ Various capacities available with plastic, aluminum, or steel housings.

10000 PSI Air Hydraulic Pump Flow Rate

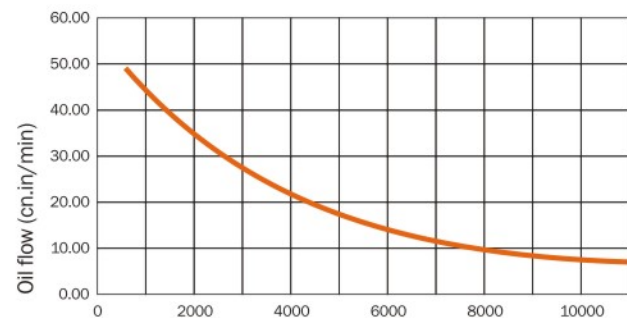

3000 PSI Air Hydraulic Pump Flow Rate

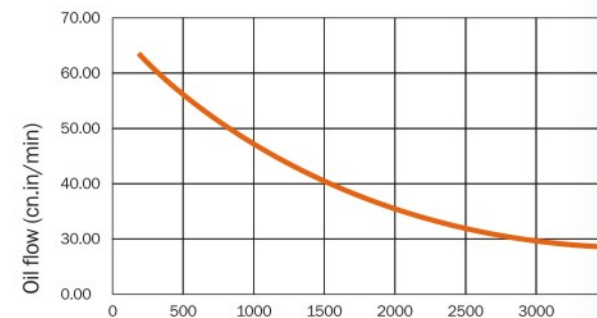

Knob style vent valve provides better operation and protection

Model	Pressure Rating (PSI)	Air Source Pressure (PSI)	Effective Oil Capacity (cu.in.)	Flow(cu.in./min)		Dimensions(in.)			Oil Tank Material	Operational Manner	Weight lbs
				No load	Load	L	W	H			
EPC-001	10000	90-145	140	49.5	7.6	12.3	6.7	7.5	Engineering Plastic	Foot Pedal	26
EPC-002	10000	90-145	98	49.5	7.6	10.3	5.3	7.3	Alloy Aluminum	Foot Pedal	19
EPC-003	10000	90-145	275	49.5	7.6	12.5	7	7.5	Steel	Foot Pedal	28
EPC-004	10000	90-145	442	49.5	7.6	11	8.8	10	Steel	Foot Pedal	36
EPC-008	10000	90-145	98	49.5	7.6	10.3	5.3	7.3	Alloy Aluminum	Remote Control	25
EPC-009	10000	90-145	442	49.5	7.6	11	8.9	10.8	Steel	Remote Control	43
EPC-010	10000	90-145	98	49.5	7.6	10.3	5.3	7.3	Engineering Plastic	Foot Pedal	19